FIGURE 1 - Minimum Parking Lot Requirements
Nampa, Idaho

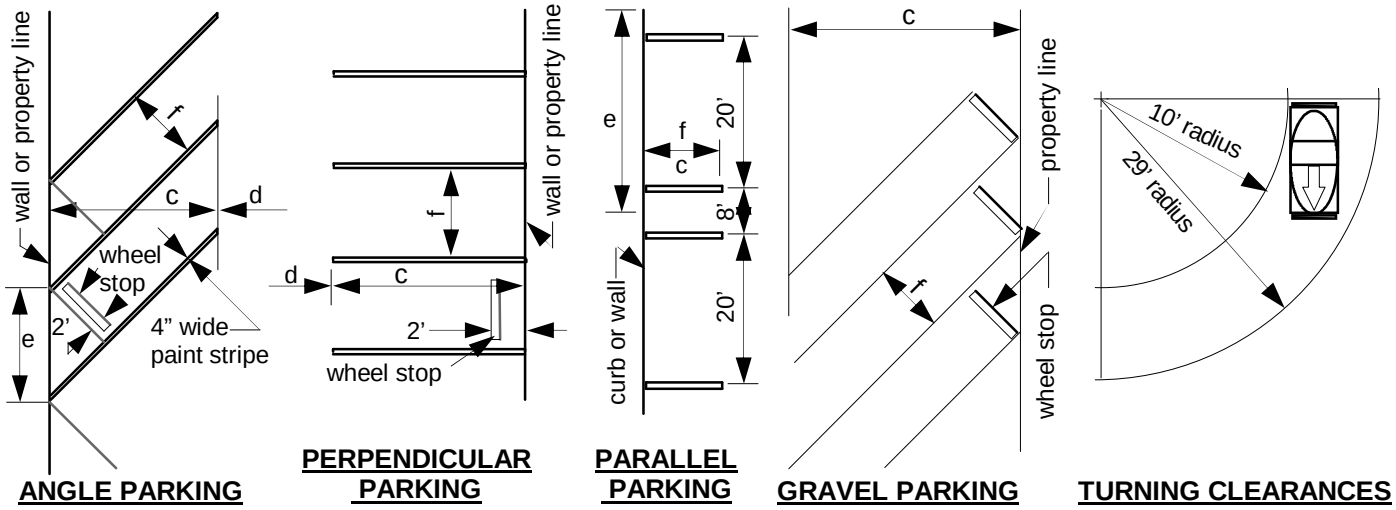

ANGLE PARKING | **PERPENDICULAR PARKING** | **PARALLEL PARKING** | **GRAVEL PARKING** | **TURNING CLEARANCES**

Two-way Traffic

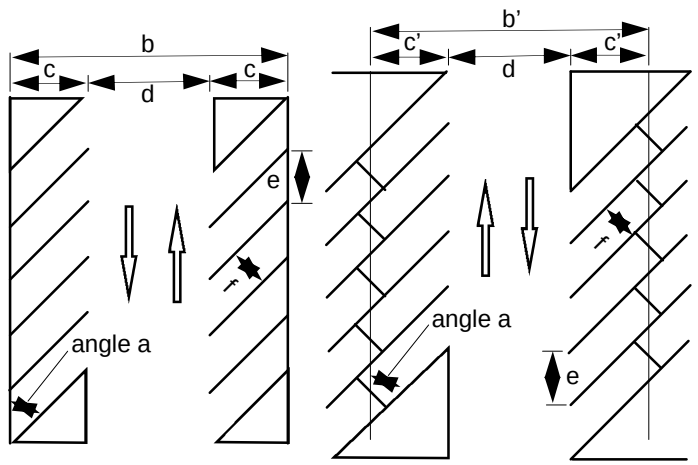

a	b	c	d	e	f	b'	c'
Parking Angle	Parking Section WIdth	Parking Bank Width	Traffic Aisle Width	Curb Length Per Car	Car Stall Width	Parking Section Width	Parking Bank Width
0°	36.0'	8.0'	20.0'	24.0'	8.0'		
-	-	-	-	-	-	-	-
35°	56.0'	18.0'	20.0'	14.8'	8.5'	49.0'	14.5'
40°	57.0'	18.5'	20.0'	13.2'	8.5'	50.0'	15.0'
45°	58.0'	19.0'	20.0'	12.0'	8.5'	51.0'	15.5'
50°	59.0'	19.5'	20.0'	11.1'	8.5'	53.0'	16.5'
55°	60.0'	20.0'	20.0'	10.4'	8.5'	55.0'	17.5'
60°	60.0'	20.0'	20.0'	9.8'	8.5'	55.0'	17.5'
65°	60.0'	20.0'	20.0'	9.7'	8.8'	56.0'	18.0'
70°	60.0'	20.0'	20.0'	9.6'	9.0'	57.0'	18.5'
-	-	-	-	-	-	-	-
90°	64.0'	20.0'	24.0'	9.0'	9.0'		

One-way Traffic

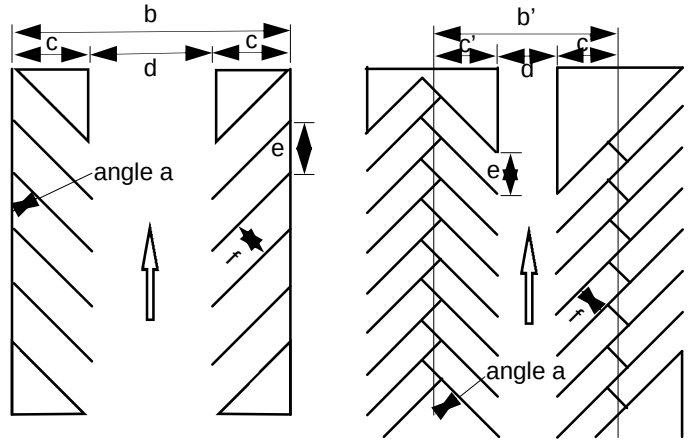

a	b	c	d	e	f	b'	c'
Parking Angle	Parking Section WIdth	Parking Bank Width	Traffic Aisle Width	Curb Length Per Car	Car Stall Width	Parking Section Width	Parking Bank Width
0°	28.0'	8.0'	12.0'	24.0'	8.0'		
-	-	-	-	-	-	-	-
35°	48.0'	18.0'	12.0'	14.8'	8.5'	41.0'	14.5'
40°	49.0'	18.5'	12.0'	13.2'	8.5'	42.0'	15.0'
45°	50.0'	19.0'	12.0'	12.0'	8.5'	43.0'	15.5'
50°	51.0'	19.5'	12.0'	11.1'	8.5'	45.0'	16.5'
55°	53.0'	20.0'	13.0'	10.4'	8.5'	48.0'	17.5'
60°	55.0'	20.0'	15.0'	9.8'	8.5'	50.0'	17.5'
65°	57.0'	20.0'	17.0'	9.7'	8.8'	53.0'	18.0'
70°	59.0'	20.0'	19.0'	9.6'	9.0'	56.0'	18.5'
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-